

Plow Rubber Cutting Edge Order Form

Note: When obtaining measurements from your current cutting edge, please measure for the **center line** of the slots. When taking measurements please note that a rubber cutting edge should not overhang the bottom of moldboard by more than the thickness of the cutting dege. When mounting a plow rubber cutting edge, use your old cutting edge or a piece of steel as a retaining bar, sandwiching the cutting edge against the moldboard.

If you have any questions, please call us at 877-265-8267

Name: _____
 Title: _____
 Company _____
 Address: _____
 Email: _____
 Tel: _____ Ext: _____
 Fax: _____


Plow Make: _____

Plow Model: _____

Cutting Edge OEM Part Number: _____



Diagram 2

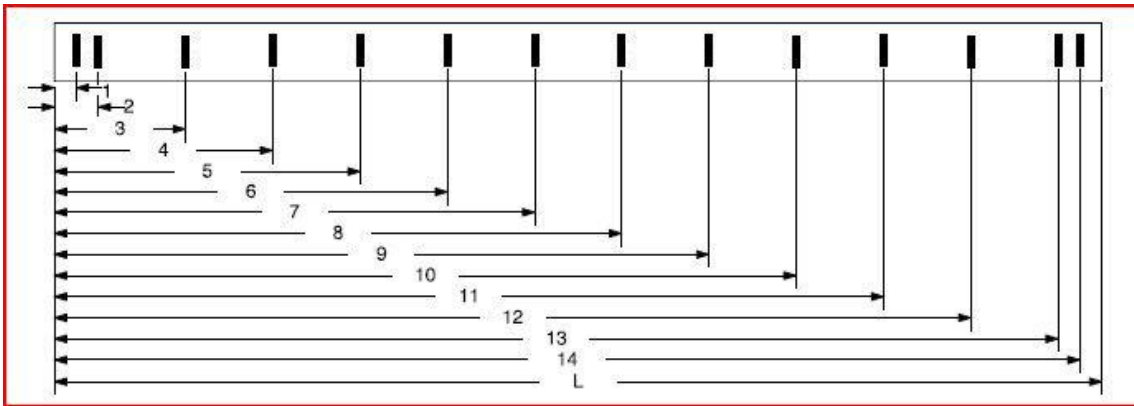

1. Overall width of cutting edge (W) ____
2. Overall length of cutting edge (L) ____
3. Thickness of cutting edge (T) ____
4. Number of slots ____
5. Please provide the distances for all applicable slots
 (1)____ (2)____ (3)____ (4)____ (5)____ (6)____ (7)____ (8)____ (9)____ (10)____ (11)____
 (12)____ (13)____ (14)____ (15)____ (16)____ (17)____ (18)____ (19)____ (20)____ (21)____
 (22)____ (23)____ (24)____
6. Indicate the diameter of the slots (D)____; if slots have countersink, indicate the diameter of countersink____ and depth of countersink____. If slots width (D) ____ and length (D2) ____.
7. Which size slot? (Circle one) ½ x 2 ¼ ¾ x 3 ¾ x 3 ¼ 1 x 3-¼ 1x5

Once completed, fax to Plow Rubber at 716- 852-4198.

PlowSTAKES.com

240 Seneca St. Buffalo, NY 14204 Phone number: 877-389-5753